




# WARNING

## Exploding Tyres CAN KILL



Always check that the tyre being fitted is the correct size and type.




Check to confirm the size of the wheel and look for any damage.



Repaired tyres or tyres suspected of running flat should be examined carefully before fitting or re-inflating.



Check to establish the correct tyre inflation pressure.

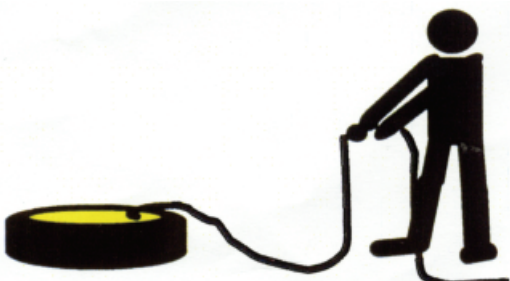

Airlines should be fitted with at least 2 metres (6 feet) of hose between the tyre and airline control.



Tyres that require more than 40 psi should be placed in a secure tyre cage and inflated.



Never leave unattended an airline which is attached to a tyre.



Don't lean over, sit, or stand in front of any tyre during inflation.

**REMEMBER** – Wheel nuts must be tightened to the correct torque setting using a *calibrated* torque wrench